



STAYER

HIGH-END POWER TOOLS

FOR ALL YOUR
PROJECTS



FOR ALL YOUR PROJECTS

Green Line

NEW RANGE
MORE **COMPETITIVE**
HIGHER **QUALITY**



Mitre Saw pág. 4



**Cordless Drill
Screwdriver Li-on** pág. 5



Percussion Drill pág. 7



**Rotary Hammer
SDS-PLUS**

pág. 8




FOR ALL YOUR PROJECTS



Angle Grinder pág. 9



Wood Line pág. 10

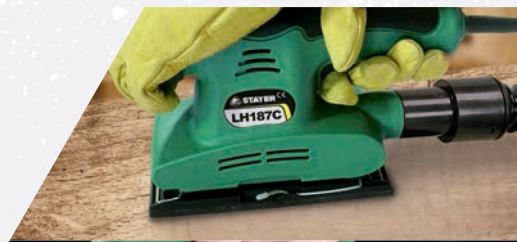

Multi Tools pág. 12



Vacuum Cleaner

pág. 14



Hot Air Gun pág. 15

YOUR PERFECT TOOLS!

Mitre Saws

SC 210 BW

Mitre Saw

NEW

Consult Availability
Available SC210W



SC 250 W

Mitre Saw

Back support



Blade size	mm	Ø 210 Z30
Power input	W	1200
No load speed	min ⁻¹	4500
Weight	Kg	12
Cutting capacity		b x h
- to 90°	mm	120x55
- to 45°	mm	65x55
- 45° slanted cut	mm	120x35
- combined 45°-45°	mm	40x23
- skirting board cut at 0°	mm	20x70
- PVC pipe	mm	Ø 70
- upper table	mm	0-33

Ø210mm disc Mitre Saw

- Aluminium base.
- Prepared for clamps.
- Built-in vacuum unit.
- **Rotary table automatic locking to 22.5° - 45° - 90°.**

- Widia Disc TCT Z-24.
- 1 piece to push the material.
- 1 scalemeter to measuring the length.
- Sliding support to 45° cutting.
- Collecting bag.

Blade size	mm	Ø 250 Z30
Power input	W	1800
No load speed	min ⁻¹	4200
Weight	Kg	15.5
Cutting capacity		b x h
- to 90°	mm	130x80
- to 45°	mm	90x75
- 45° slanted cut	mm	130x52
- combined 45°-45°	mm	71x30
- upper table	mm	0-40

Ø250mm disc Mitre Saw

- Aluminium upper table and base.
- Prepared for clamps.
- Built-in vacuum unit.
- **Rotary table automatic locking to 22.5° - 45° - 90°.**

- Widia Disc TCT Z40.
- Lateral support to facilitate the cut of large pieces.
- 1 clamp.
- 1 piece to push the material.
- 1 scalemeter to measuring the length.
- Sliding support to 45° cutting.
- Collecting bag.



FEATURES

- LED guide light at working area.
- Reversible and electronic
- 2 speeds.
- Light weight.
- Automatic chuck.
- Long life battery.

BHL 111 K

Cordless Drill Screwdriver Li-ion 12V



NEW

Consult Availability



Lithium battery voltage	V	12
Battery capacity	Ah	2.0
No load speed	min ⁻¹	0-350/0-1350
Battery charging time	min	60
Chuck capacity	mm	Ø 1.5-10
Chuck coupling	UNF	3/8"x24
Wood drilling capacity	mm	Ø 20
Steel drilling capacity	mm	Ø 10
Max. screw diameter	mm	Ø 10
Tightening torque	Nm	0-32
Torque setting	Posiciones	18
Weight	Kg	0.9

- 1 quick battery charger (1h).
- 2 lithium batteries 12 V (2.0Ah).
- 2 screwdriver bits.
- HD PE carry case.

BHL 112 BK / BHL 114 K

BHL 118 K

Cordless Drill Screwdriver Li-on 12V - 14V - 18V



	BHL 112 BK	BHL 114 K	BHL 118 K
V	12	14.4	18
Ah	1.5	1.5	1.5
min ⁻¹	0-350/0-1300	0-400/0-1100	0-400/0-1100
min	90	90	90
mm	Ø 0.8-10	Ø 0.8-10	Ø 2-13
UNF	3/8"x24	3/8"x24	3/8"x24
mm	Ø 20	Ø 30	Ø 32
mm	Ø 10	Ø 13	Ø 14
mm	Ø 10	Ø 12	Ø 15
Nm	8-20	10-26	10-28
Posiciones	18	18	18
Kg	1	1	1.5

- 2 speeds.**
- L.E.D. guide light.
- Reversible and electronic.
- Automatic chuck.

- 2 lithium batteries(12V / 14.4 V / 18V).
- 1 battery charger
- HD PE carry case.

BHL 118 PK

Cordless Drill Percussion Screwdriver Li-ion 18V

Battery voltage	V	18
Battery capacity	Ah	1.3
No load speed	min ⁻¹	0-350/0-1350
Percussions	ipm	0-5600/21600
Battery charging time	min	60
Keyless chuck	mm	Ø 0.8/10
Chuck coupling	UNF	3/8"x24
Wood drilling capacity	mm	Ø 25
Steel drilling capacity	mm	Ø 10
Maximum diameter of screws	mm	Ø 6
Tightening torque	Nm	30
Torque setting	Posiciones	21
Weight	Kg	1.8

- **Percussion for masonry works.**
- Electronic to adapt the speed to soft / hard works.
- Clutch with 21 tightening adjustment points.

- **2 mechanical speeds** to improve the tightening torque.
- Keyless chuck.
- Long life, lithium battery.
- L.E.D. guide light at working area.

- 2 lithium batteries 18V.
- 1 battery charger.
- HD PE carry case.



PERCUSSION



Cordless Screwdriver Cordless Rotary Hammer

BHL 114 BK BHL 114 BPK* BHL 118 BPK*

Cordless Drill / Screwdriver 14V - 18V

* Version P with **PERCUSSION**
0-6000/0-22000 ipm



		BHL 114 BK	BHL 114 BPK	BHL 118 BPK
Lithium battery voltage	V	14.4	14.4	18
Battery capacity	Ah	1.5	1.5	1.5
No load speed	min ⁻¹	0-400/0-1500	0-400/0-1500	0-750/0-1500
Percussion	ipm	-	0-6000/0-22000	0-6000/0-22000
Battery charging time	min	60	60	60
Impact rate	mm	Ø 10	Ø 10	Ø 10
Chuck Coupling	UNF	3/8"x24	3/8"x24	3/8"x24
Wood drilling capacity	mm	Ø 30	Ø 30	Ø 32
Steel drilling capacity	mm	Ø 13	Ø 13	Ø 14
Concrete & masonry drilling cap.	mm	Ø 12	Ø 12	Ø 15
Tightening torque	Nm	25	25	32
Torque setting	Positions	17+1	17+1	17+1
Weight	Kg	1	1	1.5

NEW
Consult Availability

- Electronic .
- Clutch with 17+1 tightening adjustment points.
- 2 Mechanical speeds for a greater tightening torque.
- Automatic chuck.
- Long life lithium battery.
- L.E.D. guide light at working area.
- 2 Lithium batteries (14.4 V / 18V).
- 1 Battery charger.
- PE-HD carry case.

ROCKY MHL 14 K Rotary Hammer



Set
accessories
30 pieces

- 3 Concrete bits SDS-Plus ø 5, 6, 8 mm.
- 3 Metal drill bits ø 5, 6, 8 mm.
- 3 Wood drill bits ø 5, 6, 8 mm.
- 20 Screwdriver bits 50 mm.
- Keyless chuck SDS-Plus ø10 mm.

Lithium battery voltage	V	14.4
Battery capacity	Ah	1.3
No load speed	min ⁻¹	0-850
Percussions	ipm	0-4800
Battery charging time	min	60
Impact rate	J	1
Chuck Coupling		SDS-PLUS
Wood drilling capacity	mm	Ø 20
Steel drilling capacity	mm	Ø 13
Concrete and masonry drilling cap.	mm	Ø 13
Tightening torque	Nm	10-28
Torque setting	Positions	19
Weight	Kg	1.3



3 functions:

1. Electropneumatic drill for concrete and bricks.
 2. No percussion drill for metal, wood and plastic.
 3. Precise screwdriver without tightening torque.
- Reversible for tightening and bits removing.
 - Logic electronic torque and security control.
 - Rotating + pneumatic beating for high perforation capacity.
 - SDS-PLUS quick change chuck, safe and professional.

- Quick battery charger.
- 1 Lithium battery.
- Set accessories 30 pieces.
- HD PE carry case.



TH 610 A

Percussion Drill



Power input	W	600
No load speed	min ⁻¹	0-3000
Percussions	ipm	0-41600
Chuck capacity	mm	Ø 2-13
Chuck coupling	UNF	1/2" x 20
Wood drilling capacity	mm	Ø 25
Steel drilling capacity	mm	Ø 13
Stone drilling capacity	mm	Ø 16
Weight	Kg	2

- Reversible.
- Electronic speed control.
- Percussion.

- Auxiliary handle with depth regulation.
- Keyless chuck Ø13 mm.

TH 610
- Ø13 mm key chuck.

TH 710 A / TH 710 AK

Percussion Drill



NEW
Consult Availability



Power input	W	700
No load speed	min ⁻¹	0-3000
Percussions	ipm	0-48000
Chuck capacity	mm	Ø 2-13
Chuck coupling	UNF	1/2" x 20
Steel drilling capacity	mm	Ø 13
Stone drilling capacity	mm	Ø 13
Weight	Kg	2

- Reversible.
- Electronic speed control.
- Percussion.

- Auxiliary handle with depth regulation.
- Keyless chuck Ø 13 mm.

TH 710 AK
- HD PE carry case.



TH 1000 AK

Percussion Drill

Power input	W	1000
No load speed	min ⁻¹	0-3000
Percussions	ipm	0-44800
Chuck capacity	mm	Ø 2-13
Chuck coupling	UNF	1/2" x 20
Steel drilling capacity	mm	Ø 13
Stone drilling capacity	mm	Ø 20
Weight	Kg	2.3

- Reversible.
- Electronic speed control.
- Percussion.

- Auxiliary handle with depth regulation.
- Keyless chuck Ø 13 mm.
- HD PE carry case.



Hammers

MH 26 K

Rotary Hammer SDS PLUS



Power input	W	800
No load speed	min ⁻¹	0-1300
Percussions	ipm	0-5500
Impact rate	J	2.8
Coupling		SDS-PLUS
Wood drilling capacity	mm	Ø 30
Concrete and masonry drilling cap.	mm	Ø 26
Drilling capacity with core bit	mm	Ø 68
Weight	Kg	2.8

3 functions:
Rotating.
Rotating / Percussion.
Chiselling.

- Reversible and Electronic
- Vario-Lock to adapt the chisel position.

For anchorages in concrete and masonry Ø 4-28 mm (optimum Ø 4-12 mm)

- Safety clutch.
- Auxiliary handle with depth regulation.
- HD PE carry case.

MH 6 BK

Rotary Hammer SDS PLUS



Power input	W	1000
No load speed	min ⁻¹	850
Percussions	ipm	4500
Impact rate	J	4
Coupling		SDS-PLUS
Wood drilling capacity	mm	Ø 13
Concrete and masonry drilling cap.	mm	Ø 26
Drilling capacity with core bit	mm	Ø 65
Weight	Kg	5

3 functions:
Rotating.
Rotating / Percussion.
Chiselling.

- Lightweight and compact.
- Suitable for chiselling works.
- **VAT** - Vibration Absorbing Technology.

- 3 drill bits.
- 1 pointer.
- 1 chisel.
- Auxiliary handle with depth regulation.
- HD PE carry case.



FH 680 Angle Grinder



Power input	W	680	- Auxiliary handle.
Disc diameter	mm	Ø 115	- Protection guard.
No load speed	min ⁻¹	11000	- Spindle lock.
Spindle thread	M	M 14	
Weight	Kg	1.7	

FH 900 B / FH 901 B Angle Grinder



Power input	W	900	
Disc diameter	mm	Ø 115	
No load speed	min ⁻¹	11000	
Spindle thread	M	M 14	
Weight	Kg	1.8	

- Auxiliary handle.
- Protection guard.
- Spindle lock.

Also available in version:

FH 901 B

- Disc ø 125 mm.

FH 700 Angle Grinder

NEW
Consult Availability



Power input	W	700	- Auxiliary handle.
Disc diameter	mm	Ø 115	- Protection guard.
No load speed	min ⁻¹	11000	- Spindle lock.
Spindle thread	M	M14	
Weight	Kg	1.7	

FH 900 C / FH 901 C Angle Grinder

NEW
Consult Availability



Power input	W	900	
Disc diameter	mm	Ø 115	
No load speed	min ⁻¹	11000	
Spindle thread	M	M14	
Weight	Kg	1.8	

- Auxiliary handle.
- Protection guard.
- Spindle lock.

Also available in version:

FH 901 C

- Disc ø 125 mm.

FH 230 B Angle Grinder

Power input	W	2100
Disc diameter	M	M 14
No load speed	min ⁻¹	6500
Spindle thread	mm	Ø 230
Weight	Kg	4.2



Rotary handle

- Powerful 2100 W S1.**
- Lightweight and versatile.
 - Increased transmission for endurance and noise reduction.
 - Suitable for workshop works and heavy duty service.

- Easy carbon brush replacement.
- Specially designed for construction.
- 3 positions auxiliary handle.

Sanders



Power input	
No load speed	
Orbit	
Plate size	
Weight	

LD 141 Delta Sander



W	180
min ⁻¹	13000
Orbit	-
mm	140x80
Kg	0.9



- Delta Sander 140x80mm**
- Lightweight.
 - Easy to operate.
 - Prepared for aspiration.
 - **Adapted for corners and edges sanding in difficult accessible areas.**
 - Plate with velcro fixing system.
 - Coupling for dust extraction.
 - 1 velcro sandpaper sheet.

LH 187 C Orbital Sander



W	150
min ⁻¹	12000
mm	2
mm	187x90
Kg	1.2

- Orbital Sander 187x90mm**
- Ergonomic design.
 - **Double fixing system (velcro or tweezers).**
 - 2 velcro sandpaper sheet.
 - Coupling for dust extraction.

LH 227 E Orbital Sander



W	280
min ⁻¹	0-12000
mm	0.8
mm	227x115
Kg	2.1

- Orbital Sander 227x115mm**
- Electronic speed control.
 - **Large sanding surface.**
 - 2 velcro sandpaper sheet.
 - **Double fixing system (velcro or clips).**
 - Dust collecting bag.

LH 190 E Orbital Sander



W	250
min ⁻¹	6000-14000
mm	0.8
mm	187x92
Kg	1.9

- Orbital Sander 187x92mm**
- Aluminium plate with double fixing system (velcro and tweezers).
 - Built-in suction system.
 - 1 velcro abrasive paper.
 - **Dust bin with HEPA filter included.**

LR 125 BE Rotoorbital Sander



W	300
min ⁻¹	12000
mm	1.2
mm	Ø 125
Kg	1.6

- Rotoorbital Sander Ø125mm**
- Electronic speed control.
 - Built-in suction system.
 - **Plate 8 holes with velcro fixing system.**
 - Adjustable height auxiliary handle.
 - Velcro sandpaper sheet.
 - Dust collecting bag.

PH 82 B Planer



W	650
min ⁻¹	17500
mm	-
mm	-
mm	0-2
mm	82
Kg	2.5

- Planer**
- Built-in suction system.
 - Protected ON/ OFF switch.
 - Double handle for a perfect control of the machine.
 - **10 position depth adjustment.**
 - Security stand support.
 - Lateral guide.
 - Dust collecting bag.



Adapter plate

Power input	
No load speed	
Orbit	
Plate size	
Depth cut	
Planing width	
Weight	

- Electronic speed control.
- **Dust bag with HEPA pleated paper-type filter.**
- Blinded switch.
- **Aluminium plate with double fixing system (velcro and nippers).**

CH 185 C

Circular Saw



Power input	W	1300
Blade size	mm	Ø 185x16 Z-24
No load speed	min ⁻¹	4500
Slanted cut	degree	45°
Cutting depth at 90°	mm	0-65
Cutting depth at 45°	mm	0-44
Weight	Kg	4.8

Circular saw

- Dust extraction coupling.
- Lightweight and easy to operate.
- Widia disc TCT Z-24.
- Lateral guide.
- Dust extraction coupling.

JS 55 BE

Jig Saw



Power input	W	450
No load speed	min ⁻¹	0-3000
Slanted cut	degree	45°
Wood cutting capacity	mm	55
Steel cutting capacity	mm	3
Aluminium cutting capacity	mm	6
Weight	Kg	1.8

Jig saw

- Slanted cut to 45°.
- Quick blade insertion.
- Electronic speed control.
- Blade for wood.
- Blade for metal.
- Dust extraction coupling.
- Lateral guide.

JS 70 PE

Jig Saw



Power input	W	570
No load speed	min ⁻¹	800-2800
Slanted cut	degree	45°
Wood cutting capacity	mm	65
Steel cutting capacity	mm	8
Aluminium cutting capacity	mm	10
Weight	Kg	2

Jig saw

- Electronic speed control.
- Pendulum action three positions
- Slanted cut to 45°.
- Quick blade insertion.
- Blade for wood.
- Blade for metal.
- Dust extraction coupling.
- Lateral guide.

JS 80 PE

Jig Saw



Power input	W	710
No load speed	min ⁻¹	800-2800
Slanted cut	degree	45°
Wood cutting capacity	mm	80
Steel cutting capacity	mm	10
Aluminium cutting capacity	mm	16
Weight	Kg	2.3

Jig saw

- Electronic speed control.
- Pendulum action three positions
- Slanted cut to 45°.
- Quick blade insertion.
- Blade for wood.
- Blade for metal.
- Dust extraction coupling.
- Lateral guide.

MULTI RAZER 85

Multifunction Circular Saw

Ø85mm Abrasive Discs for metal cutting.

- 3 metal cutting abrasive discs.
- 3 multicut abrasive discs.

For all type of materials cutting.

- LASER guided precision cutting.
- Comfortable and safe support base.
- Graduated guide for an accurate cut.
- Powerful S1 motor.
- Plunge cutting capacity.

CRC / HSS / TCT Discs



Abrasive discs
Metal cutting / Multicut

Power input	W	600
No load speed	min ⁻¹	5500
Blade size	mm	Ø 85
Cutting depth	mm	0-24
Weight	Kg	2

Power input	W	600
No load speed	min ⁻¹	5500
Blade size	mm	Ø 85
Cutting depth	mm	0-24
Weight	Kg	2

Includes:

- CRC diamond disc (special for ceramic tiles).
- TCT Widia disc (special for wood).
- HSS disc (special for soft metals and aluminium).
- 3 metal cutting abrasive discs .
- 3 multicut abrasive discs.

- High precision laser guide.
- Guide spacer for an accurate cut.
- Coupling for dust extraction.
- HD PE carry case.



MULTI DRILL 130

Compact Multitool

Power input	W	130
No load speed	min ⁻¹	8000-33000
Chuck capacity with adapter	mm	0-32
Weight	Kg	1.5

Power input	W	130
No load speed	min ⁻¹	8000-33000
Chuck capacity with adapter	mm	0-32
Weight	Kg	1.5

- Speed control.
- Universal use in all materials

- 110 cm flexible shaft.
- Case in plastic containing 200 accessories:
- Drilling.
- Sanding.
- Cutting.
- Sharpening.
- Routing.
- Polishing.

Optional
Extension cable



Electronic speed control





E 150 B Bench Grinder



Power input
No load speed
Grinding wheel diameter
Weight

W	150
min ⁻¹	2950 (50Hz) / 3500 (60Hz)
mm	Ø 150x16x12.7
Kg	4

Bench grinder with 2 grinding wheels Ø 150 mm for sharpening and metal works. Motor 150 W class E.

- Sealed ball bearings for a longer life and smooth use.
- Workpiece rest support with easy manual adjustment.
- Solid casting housing.

- Induction motor.
- Light and compact bench grinder.
- Electromagnetic switch protected against dust.
- Transparent protectors against sparks for optimal work security.
- 2 rest supports to compensate wear of the grinding wheel..
- 2 grinding wheels Ø 150 mm A36 and A60.
- Rubber feet for safe and vibration-free use.

EP 200 B Bench Grinder



Power input
No load speed
Grinding wheel diameter
Weight

W	350
min ⁻¹	2950 (50Hz) / 3500 (60Hz)
mm	Ø 200x20x16
Kg	11.5

Bench grinder with 2 grinding wheels Ø 200 mm. Constant speed motor fully supported on ball bearings, sealed to avoid dust entrance.

- Electromagnetic switch protected against dust.
- 270° protection casings.
- Transparent protectors against sparks for optimal work security.

- Workpiece rest support with easy manual adjustment.
- Rubber feet for safe and vibration-free use.
- 2 grinding wheels Ø 200 mm grain A36 and A60.

COMBINED GRINDERS - FEATURES

Electromagnetic switch protected against dust.

Constant speed motor fully supported on ball bearings, sealed to avoid dust entrance.

- 270° protection casings.
- Large adjustable protection lens.
- Workpiece rest support with easy manual adjustment.
- Rubber feet for safe and vibration-free use.
- 2 grinding wheel Ø 200 mm grain A36 and A60.

Power input
No load speed
Grinding wheel
Grinding wheel sharpening
Brush
Sandpaper dimension
Weight

ECA 150 B Bench Grinder/Sharpener



W	350
min ⁻¹	2950
mm	Ø 150x20x12.7
mm	Ø 200x40x20
Brush	-
Sandpaper dimension	-
Kg	8.5

- Ø 150 mm grinding wheels.
- Ø 200 mm grinding sharpening wheels.

ECP 150 B Bench Grinder/Sharpener



W	350
min ⁻¹	2950
mm	Ø 150x20x12.7
mm	-
mm	Ø 150
mm	-
Kg	8.5

- Ø 150 mm grinding wheel.
- Ø 150 mm brush.

ECL 150 B Bench Grinder/Sander



W	350
min ⁻¹	2950
mm	Ø 150x20x12.7
mm	-
mm	-
mm	50x686
Kg	8.5

- Ø 150 mm grinding wheel.
- Sanding band.

Small Compressor and Vacuum Cleaners



MINICOM 12V Compressor



Rated Power	W	90
Voltage	V	12
Maximum pressure	kg/cm ²	17
Air flow (capacity)	L/min	30
Weight	Kg	0.4
Dust tank capacity		
Water tank capacity		
Aspiration		
Tube diameter		
Tube length		

W	90
V	12
kg/cm ²	17
L/min	30
Kg	0.4

- To inflate tires, balls, etc...
- Compact, lightweight and portable.
- Pressure gauge.
- Direct connection to the car cigarette lighter.
- ON-OFF switch.

- 3 meter connection cable.
- 1 nozzle to inflate tires.
- 1 nozzle to inflate floats.
- 1 nozzle needle to inflate balls.

CV 12 B Car Vacuum Cleaner



W	60
V	12
	-
	-
Kg	0.63
L	0.5
L	0.12

- 2.8 m power cable.
- Car connection.

BC 800 Ash Vacuum Cleaner



W	800
	-
	-
	-
Kg	3.6
L	10
	-
Kpa	16
mm	Ø 38
m	1

- Very light and easy to transport.
- Metal flexible hose.

- Steel suction tube.
- Carry handle.
- Rigid handle for motor and filter extraction, length 20 cm.
- HEPA filter.

BC 1200 D Ash Vacuum Cleaner

Power input	W	1200
Dust tank capacity	L	20
Aspiration	Kpa	19
Tube diameter	mm	Ø 38
Tube length	m	1
Weight	Kg	4.5

W	1200
L	20
Kpa	19
mm	Ø 38
m	1
Kg	4.5

- Powerful motor 1200 W.**
- Very light and easy to transport
 - Metal flexible hose for a safe aspiration.

- Ø 38 mm steel suction tube.
- Carry handle.
- Extraction rigid handle, length 20 cm.
- HEPA filter.

Available in 3 colors
Black - Red - Green.



Optional
Cod. 8190.98
HEPA filter + filter covers



EPG 300

Paint Gun



Optional
Cod. 5015.192
1.80 mm nozzle
(low viscosity paint).



Power input	W	400
Sprayer pressure	Bar	0.1-0.2
Tank capacity	L	0.8
Supply capacity	g/min	300
Maximum viscosity	DIN/sec	30
Nozzle	mm	Ø 2.5
Weight	Kg	1.47

- Quick tank removal for a fast work.
- Easy nozzle removal.

- Viscosity meter.



EPG 700

Paint Gun



Nozzle



Power input	W	700
Sprayer pressure	Bar	0.1-0.3
Tank capacity	L	0.8
Supply capacity	g/min	1200
Maximum viscosity	DIN/sec	50
Nozzle	mm	Ø 2.5
Weight	Kg	4.5

- Wheeled trolley and telescopic handle.

- Quick disassembly of the tank.
- Easy storage of the hose and cord.
- Adjustable knob for paint flow regulation.
- Soft grip handle.
- Three patterns of paint.

- Paint viscosity meter.
- Cleaning needle.



Optional
Cod. 5015.192
1.80 mm nozzle paint
with low viscosity.

SUH 2000 E / SUH 2000 EK


Hot Air Gun

Power input	W	2000
Hot air flow	L/min	250-450
Temperature	°C	50-450/90-600
Weight	Kg	0.9

- Electronic speed control.
- Variable temperature.
- Variable air flow.

SUH 2000 EK
- Complete accessories kit.
- HD PE carry case.



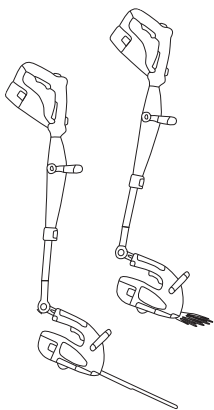

MULTIGARDEN 18

Set Multigarden



Battery voltage	V	18
Battery capacity	Ah	1.3
Charging time	min	60
Hedge trimmer		
No load speed	min ⁻¹	9000
Cutting length	mm	410
Tooth spacing	mm	8
Weight	Kg	2.54
Grass trimmer		
No load speed	min ⁻¹	1100
Cutting capacity	mm	Ø 240
Thread	mm	Ø 1.2
Weight	Kg	2.60

V	18
Ah	1.3
min	60
min ⁻¹	9000
mm	410
mm	8
Kg	2.54
min ⁻¹	1100
mm	Ø 240
mm	Ø 1.2
Kg	2.60



cod. 4028.96
Scissors



cod. 4028.97
Saw

- Battery charger.
- **2 Batteries Ni-Cd.**
- Telescopic guide.
- Trimming scissors.

- Pruning saw.
- Double action trimmer.
- 2 threads reel.

Power input	W	550
No load speed	min ⁻¹	10500
Cutting capacity	mm	Ø 290
Thread thickness	mm	Ø 1.4
Weight	Kg	2.3

CUTTY 600

Grass Trimmer



W	550
min ⁻¹	10500
mm	Ø 290
mm	Ø 1.4
Kg	2.3

Telescopic height.
Semiautomatic wire feed.

- 2 threads reel.
- Adjustable front handgrip and shaft height.



cod. 5025.72
Wire reel

FEATURES

- Double action blades.
- Automatic protection clutch.
- Safety switch.
- Protective shield.
- Suitable for left and right users.
- Quick stop.
- Blade guard.

ROSE 550 / ROSE 710 B

Hedge Trimmer



ROSE 550

Power input	W	580
No load speed	min ⁻¹	1600
Cutting length	mm	550
Tooth spacing	mm	17
Weight	Kg	2.3
Speed		
Capacity		
Air flow		

W	580
min ⁻¹	1600
mm	550
mm	17
Kg	2.3

Power input	W	710
No load speed	min ⁻¹	1600
Cutting length	mm	600
Tooth spacing	mm	22
Weight	Kg	2.76

ROSE 710 B	
W	710
min ⁻¹	1600
mm	600
mm	22
Kg	2.76

VENTO 2400 C

Leaf Vacuum / Blower Shredder



W	2400
min ⁻¹	9000-13000
Kg	3.8
Km/h	Max. air 270
L	Collection bag 45
13 mc/min 780 mc/h	

- Suitable for leaf shredding.
- Blower and aspirator.
- Support wheels.
- Telescopic suction tube.
- Electronic control 5 positions.

- Collection bag.
- Blower / aspirator tube.
- Carrying belt.

OLMO 22-400B

Electric Chain Saw



W	2200
min ⁻¹	7000
mm	400
Kg	without bar and chain 5
m/sec	Cutting 13.5
ml	Oil tank 120

- Automatic chain lubrication and adjustable.
- Visible oil level.
- Safety brake.
- Safety switch.
- Anti-Shock Device.
- **Quick and easy external chain tightening.**

- Protection chain cover.
- Chain and bar.

MITRE SAWS

SC0 210 W
cod. 12.229
Widia Disc
Ø 210x2.8x30 mm Z-24



SC 250 W - cod. 2.33
Widia Disc
Ø 250x3.2x30 Z-40



SC 250 W - cod. 2.34
Widia Disc
Ø 250x3.2x30 Z-48



SC 250 W - cod. 12.179
Widia Disc
Ø 250x3.2x30 Z-60



DRILLS / SCREWDRIVERS

Charger 12 V - 1.5 Ah
BHL 112 BK - cod. 12.518



Charger 14 V - 1.5 Ah
BHL 114 K - cod. 12.528



Charger 18 V - 1.5 Ah
BHL 118 K - cod. 12.529

Battery 12 V - 1.5 Ah
BHL 112 BK - cod. 12.519



Battery 14 V - 1.5 Ah
BHL 114 K - cod. 12.520



Battery 18 V - 1.5 Ah
BHL 118 K - cod. 12.521



Battery 12 V - 1.5 Ah
BHL 111 K - cod. 12.387



Charger 12 V - 1.5 Ah
BHL 111 K - cod. 12.310



Charger 14 V - 1.5 Ah
BHL 114 BK/BPK - cod. 12.476



Charger 18 V - 1.5 Ah
BHL 118 BK/BPK - cod. 12.477



Battery 14 V - 1.5 Ah
BHL 114 BK/BPK - cod. 12.478



Battery 18 V - 1.5 Ah
BHL 118 BPK - cod. 12.479



Charger 18 V - 1.3 Ah
BHL 118 PK
cod. 8293.23



Battery 18 V - 1.3 Ah
BHL 118 PK
cod. 8293.22



Charger 14.4 V - 1.3 Ah
BHL 14 K / ROCKY MHL 14 K
cod. 4028.262



Battery 14.4 V - 1.3 Ah
BHL 14 K / ROCKY MHL 14 K
cod. 4028.260



DRILLS / HAMMERS

TH 610 A / TH 700 BA
cod. 12.508
Keyless chuck - Ø 13 mm.



TH 1000 AK - cod. 12.26
Keyless chuck
Ø 13 mm - 1/2"x20



TH610 - cod. 12.37
Key chuck - Ø 13 mm.



ANGLE GRINDERS

cod. 12.29
Locking nut M 14



cod. 11.4624
Quick locking keyless nut
M14



cod. 12.20
Nylon disc - Ø 115 mm



cod. 12.28
Nylon disc - Ø 170 mm



SUPPORTS

SG 43B - cod. 12.517
- Drill support.
- Neck 43 mm.
- Range 68 mm.
- Inclination 0-90°.
- Weight 6.5 Kg.



BA 115 - cod. 12.300
Angle grinder support
Ø 115 mm - Ø 125 mm.



BA 230 - cod. 12.301
Angle grinder support
Ø 230 mm.



Accessories

SANDERS

LH 187 C - cod. 12.423
Set 10 pcs sandpapers.
187x90 mm.



LH 227 E - cod. 12.415
Set 10 pcs (Velcro sandpapers
Gr.40-60-80-120)
227x115 mm.



LD 141 - cod. 12.446
Set 10 pcs (Velcro sandpapers
Gr.40-60-80-120)
140x140x80 mm.



LR 125 BE - cod. 12.416
Set 10 pcs (Velcro sandpapers
Gr.40-60-80-120)
Ø 125 mm.



PLANER PH 82 B

cod. 12.195
Blades kit - 82 mm.



CIRCULAR SAW

CH 185 C - cod. 2.176
Widia disc Ø 185 mm.



JIG SAWS

JS 55 BE - cod. 11.5811
Set 5 pcs. Blades for wood.



JS 80 PE - cod. 12.2
Set 5 pcs. Blades for wood.



cod. 12.422
Set 10 pcs:
- 5 blades for wood.
- 3 blades for iron.
- 2 blades for
aluminium.



JS 55 BE - cod. 11.5812
Set 5 pcs. Blades for iron.



JS 80 PE - cod. 12.183
Set 5 pcs. Blades for aluminium.



JS 55 BE - cod. 11.5813
Set 5 pcs. Blades for aluminium.



JS 80 PE - cod. 12.184
Set 5 pcs. Blades for iron.



MULTI TOOLS

MULTI RAZER 85

cod. 1.1133
3 blistered discs set Ø 85 mm:
- Diamante CRC.
- Widia TCT.
- Sierra HSS.



cod. 1.1094
6 blistered abrasive discs set
Ø 85 mm.



MULTI DRILL 130

cod. 1.891
180 accessories set.



BENCH GRINDERS

cod. 8110.139
Grinding wheel Ø 200x20x16.
Gr60 (for sharpening)
EP200B.



cod. 8110.184
Grinding wheel Ø 200x20x16.
Gr36 (for grinding)
EP200B.



cod. 8110.364
Wheel Ø 150x20x12.7.
Gr 36 (for grinding)
EP150B /
ECA150B / ECP150B.



cod. 8110.370
Wheel Ø 150x16x12.7.
Gr 60 (for sharpening)
E150 B.



cod. 8110.371
Wheel Ø 150x16x12.7.
Gr 36 (for grinding)
E150 B.



cod. 4104.1300
Sharpening wheel
Ø 200x40x20.
ECA150B.



cod. 5025.147
Brush Ø 150x20.
ECP150B.



cod. 8110.368
Sandpaper
50x686 mm.
ECL150B.



cod. 8110.369
5 sandpapers set.
50x686 mm.
ECL150B.



ASH VACUUM CLEANERS BC 800 / BC 1200 D

cod. 8190.21
Tube.



cod. 8190.22
Flexible hose.



cod. 8190.98
Hepa filter and Filter covers.



PAINT GUN

Cod. 5015.192
Nozzle Ø 1.8 mm.



Cod. 5015.91
Nozzle de Ø 2.5 mm.



MULTIGARDEN 18

cod. 4028.126
Charger.



cod. 4028.97
Saw.



cod. 4028.96
Scissors.



cod. 4028.125
Battery 18 V.



cod. 4028.98
Blades
for grass trimmer.



cod. 4028.105
2 threads reel.



GRASS TRIMMERS

Cutty 600 - cod. 5025.72
2 threads reel.



ELECTRIC CHAIN SAW - OLMO 22-400 B

cod. 5025.168
Chain.



cod. 5025.269
Bar.





STAYER IBERICA, SA.

C/Sierra de Cazoria, 7
Area Empresarial de Andalucía sector 1
28320 Pinto (Madrid) Spain
T +34.91.691.86.30
info@grupostayer.com

www.grupostayer.com

